



Part Number:

Superlift #5724 • Black Diamond #716240

Description:

Optional fixed-length front / lower axle-to-frame links. Use with Superlift (4") and Black Diamond (3") JK lifts to gain additional caster angle if eccentric cam bolts, included with lift systems, do not provide adequate caster angle. Links can be used with, or in place of, eccentric cam bolts.

Applications:

2007-2008 Jeep JK 2WD / 4WD (2 door and 4 door) equipped with 3" or 4" suspension lift.

Features:


- * Constructed of 2" OD, .188" wall thickness DOM tubing
- * Combination of greasable Urethane bushings (at axle end) and steel-encased rubber bushings (at frame end) provides the perfect balance of flexibility, noise-free operation and control.
- * Durable black powder coat finish

Is it in current Superlift (#115) and Black Diamond (2008) catalogs?

YES

Make these Catalog Corrections in Superlift and Black Diamond Catalogs

Neither fixed-length or Rockrunner / XT links work with 2" lift. Caster correction is generally *not* needed with this minimal lift, but in case it is, Superlift offers eccentric cam bolts.

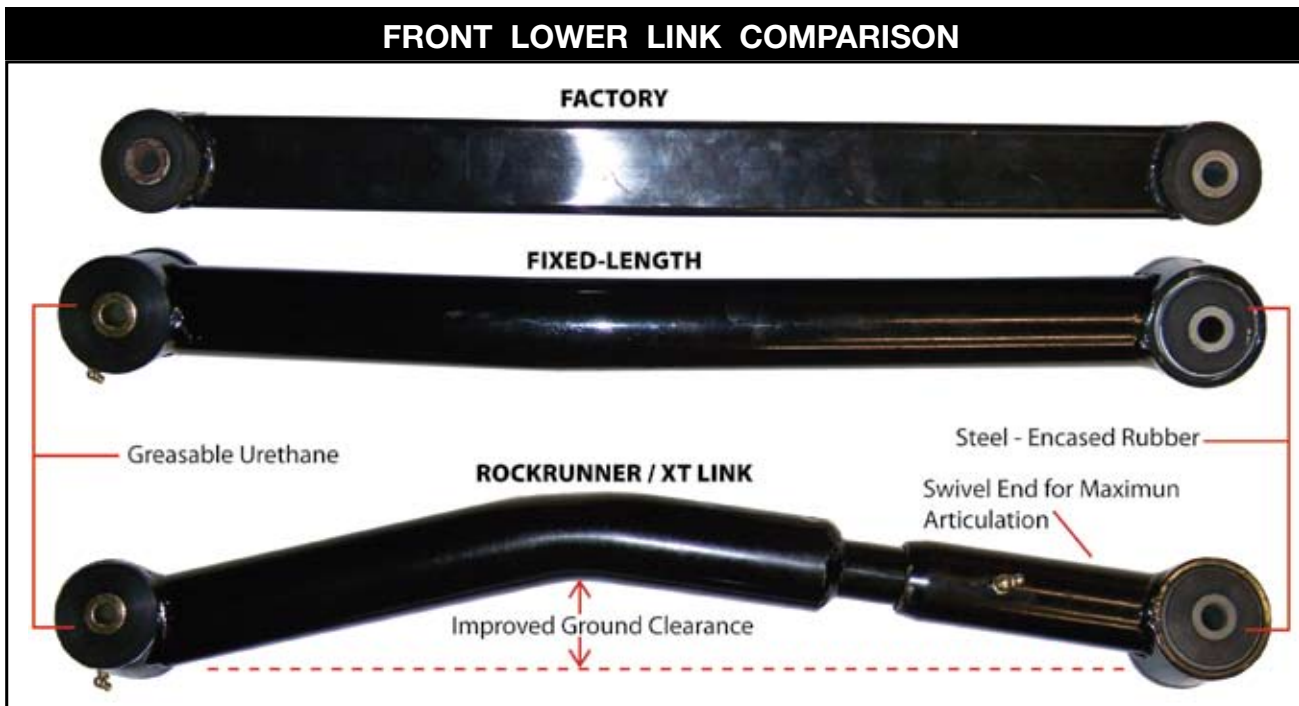

Superlift also offers Rockrunner links (called XT links in our Black Diamond line) for optimal articulation plus additional ground clearance. These links have been shipping for some time; they are shown for comparisons sake.

SUPERLIFT - JK FIXED FRONT LOWER LINK				BLACK DIAMOND - FIXED FRONT LOWER LINK			
Part #	Jobber	UPC	Box Deminsions	Part #	Jobber	UPC	Box Deminsions
5724	239.64	804260069032	31.5x4.5x3.25	716240	212.48	804260069117	27.75x3.875x2.4375